

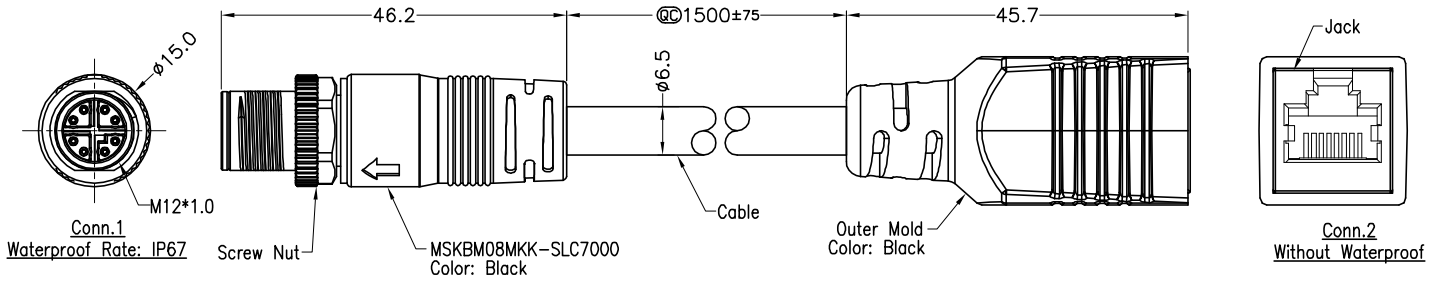


| | | | | |
|--------|---------|-----------------|-------------|---|
| REV. A | ECN NO. | DATE 2018/10/15 | SIGN Miller | DESCRIPTION Change Rev 05 To Issue Rev A. |
|--------|---------|-----------------|-------------|---|



- Note:
- Waterproof Rate: IP67
(No Ingress Of Dust/ Protected Against Harmful Effects Caused In 1 Meter Water Within 30 Minutes)
 - Temperature Range: -20°C to +80°C
 - Material:
 Conn.1: Nylon, Black
 Conn.2: RJ45, 8P8C Jack, Gold Plated, Shielded
 Screw Nut: Zinc Alloy, Nickel Plated
 Pin: Copper Alloy, Gold Plated
 - Cable: CAT.5E FTP 24AWG*4P+Mylar+Draid+Al.Mylar, PVC Black, UV Resistant, OD=ø6.50mm



| Shield | Drain Wire | 地線 | Shield | |
|-----------|--------------|-----|--------|-------|
| 8 | Blue | 藍 | 4 | Twist |
| 7 | Blue/White | 藍/白 | 5 | |
| 6 | Brown | 棕 | 8 | Twist |
| 5 | Brown/White | 棕/白 | 7 | |
| 4 | Green | 綠 | 6 | Twist |
| 3 | Green/White | 綠/白 | 3 | |
| 2 | Orange | 橘 | 2 | Twist |
| 1 | Orange/White | 橘/白 | 1 | |
| Conn.1 | Wire Color | | Conn.2 | |
| ◎◎Pin Out | | | | |

| | | | | | | | |
|--------------------------|--------------|-------|----------|--------------------|--------|------------|------------|
| ODS 歐德斯電通科技股份有限公司 | | | | | | | |
| TITLE: LAN CABLE | | | | | | | |
| QC | check | Reg | PART NO. | CT-M12CM08-X-RJJ-1 | DATE | 2018/10/15 | |
| TOLERANCE | ±0.50 | SCALE | 1:1 | DWN. | Miller | DATE | 2018/10/15 |
| | UNIT: mm | SIZE | A4 | CHKD. | Nancy | DATE | 2018/10/15 |
| | SHEET 1 of 1 | REV. | A | APVD. | Reg | DATE | 2018/10/15 |