

IES3016

16-port 10/100M Ethernet

Unmanaged Industrial Ethernet Switch

Features

- Support IEEE802.3, IEEE802.3u, IEEE 802.3x
- Store and Forward switching process type
- Support MAC address auto-learning, auto-aging
- Support 8K MAC address
- Support 12.8Gbps backboard bandwidth
- Support redundancy power supply(12~48VDC)
- Operating temperature range from -40 to 75°C
- Designed without fan
- DIN rail mounted
- Metal shell, IP40 protection class




Introduction

IES3016-P (12/48VDC) is unmanaged Industrial Ethernet switch with high performance, high cost-effective, it provided 16 Ethernet port. Product accorded to CE, FCC standard and Industry grade 4 design requirement, support 2 redundant power input and -40~75°C

working temperature, can meet all kinds of Industrial environment requirement. It can use in power, water conservancy, transportation area etc.

Dimension

Unit (mm)

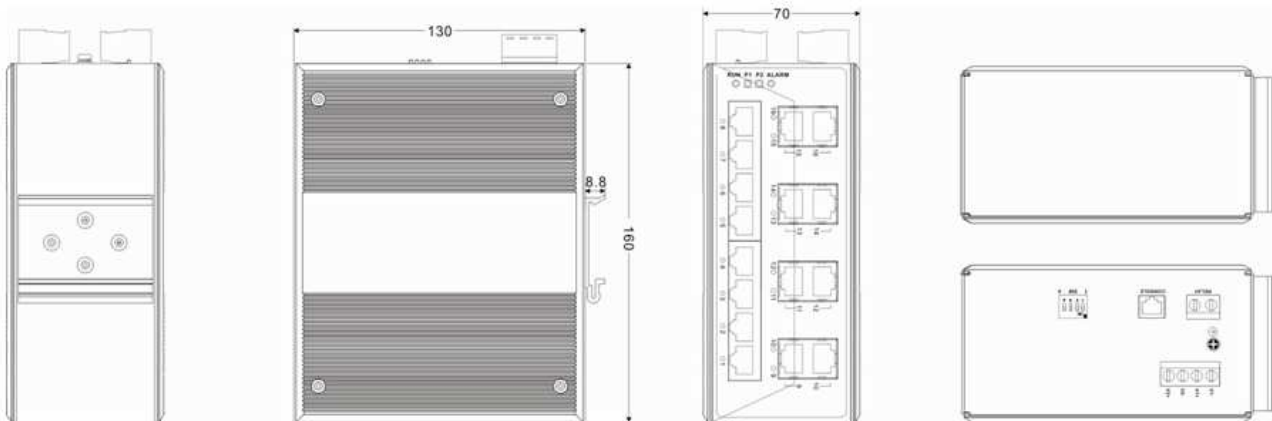

Specification

Technology

Standard: Support IEEE802.3, IEEE802.3u, IEEE 802.3x,
Flow control: IEEE802.3x flow control, back press flow control

Exchange attribute

100M forward speed: 148810pps
100M maximum filter speed: 148810pps
Transmit mode: store and forward

System exchange bandwidth: 12.8G

MAC address table: 8K

Memory: 4M

Interface

Electric port: 10Base-T/100Base-TX auto speed control, Half/full duplex and MDI/MDI-X auto detect

Console port: Retain



Alarm port: 2 bit terminal block (Retain)

1 channel relay alarm output

Transfer distance

Twisted cable: 100M (standard CAT5/CAT5e cable)

LED indicator

Run indicator: Run

Interface indicator: Link (1~16)

Power supply indicator: P1, P2

Alarm indicator: Alarm

Power supply

Input Voltage: 24VDC (12~48VDC)

Input method: 4 bits 7.62mm terminal block

Support DC dual power supply redundancy

Overload current protect: 4.0A

Consumption

No-load consumption: 4.82W@24VDC

Full-load consumption: 7.30W@24VDC

Working environment

Working temperature: -40~75°C

Storage temperature: -40~85°C

Relative Humidity: 5%~95 % (no condensation)

Mechanical Structure

Shell: IP40 protect grade, metal shell

Installation: DIN rail

Size (W×H×D): 70mm×160mm×130mm

Industry Standard

EMI: FCC Part 15, CISPR (EN55022) class A

EMS: EN61000-4-2 (ESD), Level 4

EN61000-4-3 (RS), Level 3

EN61000-4-4 (EFT), Level 4

EN61000-4-5 (Surge), Level 3

EN61000-4-6 (CS), Level 3

EN61000-4-8, Level 5

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

Certification

CE, FCC, RoHS, UL508 (Pending)

Warranty: 5 years

Packing List

1. Industrial Ethernet switch IES3016 (plus terminal block)×1
2. User manual x 1
3. Certificate of quality x 1
4. Warranty card x 1